


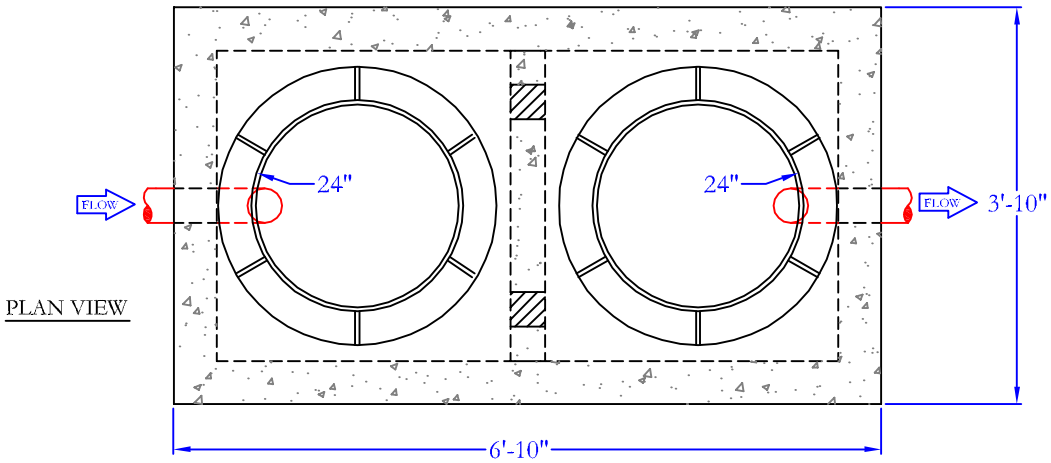


## SPECIFICATIONS:

**CONCRETE:** Class 1 concrete with design strength of 4500 PSI at 28 days. Unit is of monolithic construction at floor and first stage of wall. Baffle is slide in type.

**REINFORCEMENT:** Grade 60 reinforced with steel rebar conforming to ASTM A-615 on required centers.

**C.I. CASTINGS:** Cast Iron Ring & Cover shall be nominal 24" and traffc duty
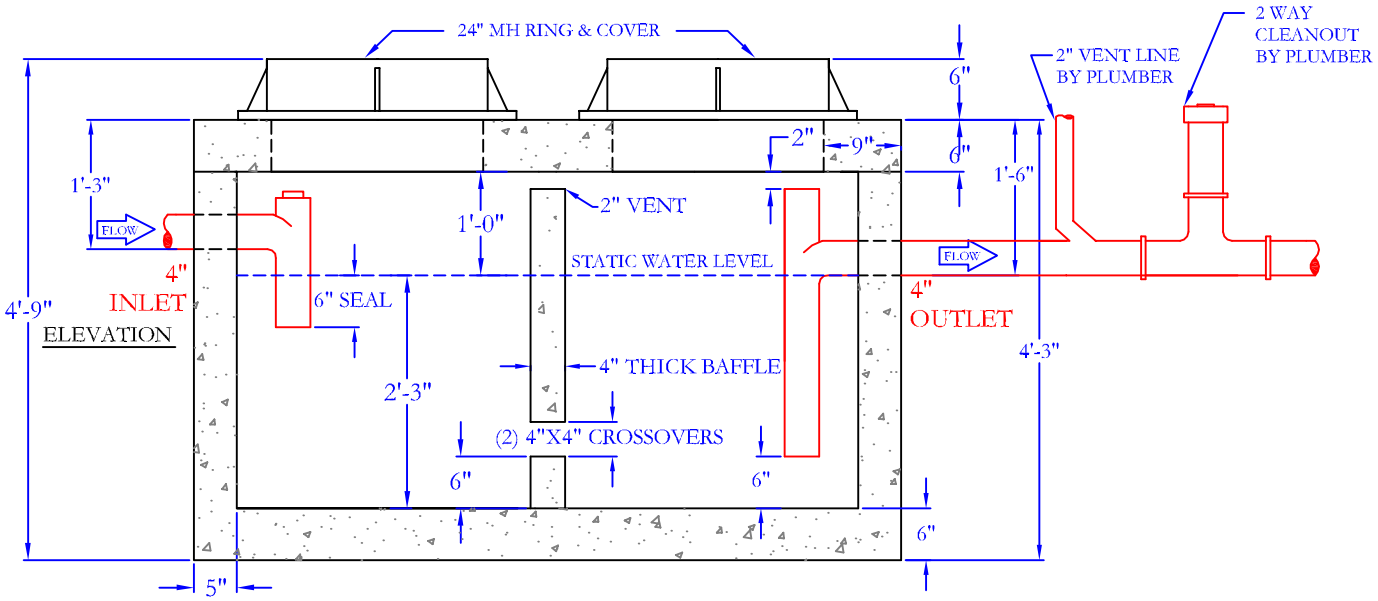
## ENGINEERING DATA:

Grease Trap is structurally and hydraulically engineered conforming to Louisiana Department of Health & Hospitals Plumbing Code. Nominal liquid capacity as indicated on plan.

Field excavation and preparation shall be completed prior to delivery of grease trap. Use dimensional data as shown.

# 300 GALLON GREASE TRAP

## GCP-300GT (TR)

SCALE: NOT TO SCALE | DATE: 12/29/10 IA

gainey's CONCRETE PRODUCTS

NPCA CERTIFIED PLANT

28021 Coker-Vail Road Holden, LA 70744
Phone (225) 567 - 2700 Fax (225) 567 - 3089
www.gaineysconcrete.com