

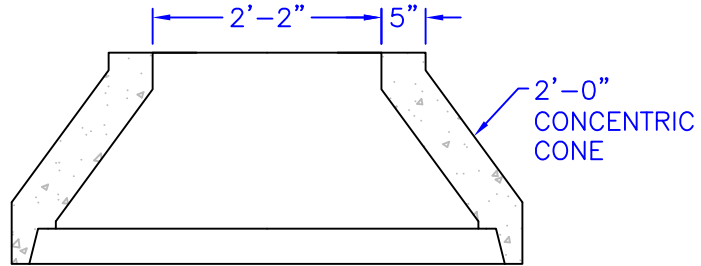


NOTE:


- MANHOLE PRODUCED IN ACCORDANCE WITH ASTM C-478
- 4,000 PSI MIN. DESIGN STRENGTH AT 28 DAYS
- REINFORCED WITH WELDED WIRE MAT AND #4 REBAR AS NEEDED TO MEET REQUIREMENTS OF ASTM C-478
- JOINTS TO BE SEALED WITH PRESS-SEAL RUBBER GASKETS (MEETS ASTM C443)

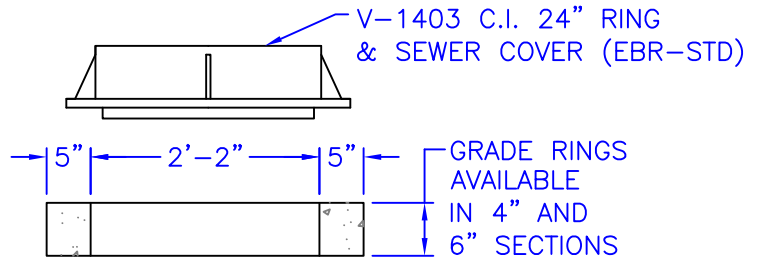

RISER SECTION AVAILABLE IN 1', 2', 3' & 4' SECTIONS OR AS REQUIRED

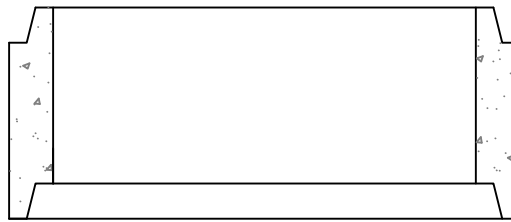

INTERNALLY COATED WITH BASF SEWER GUARD HBS 100 EPOXY LINER PER EBR SPEC (TYP. ALL SECTIONS)

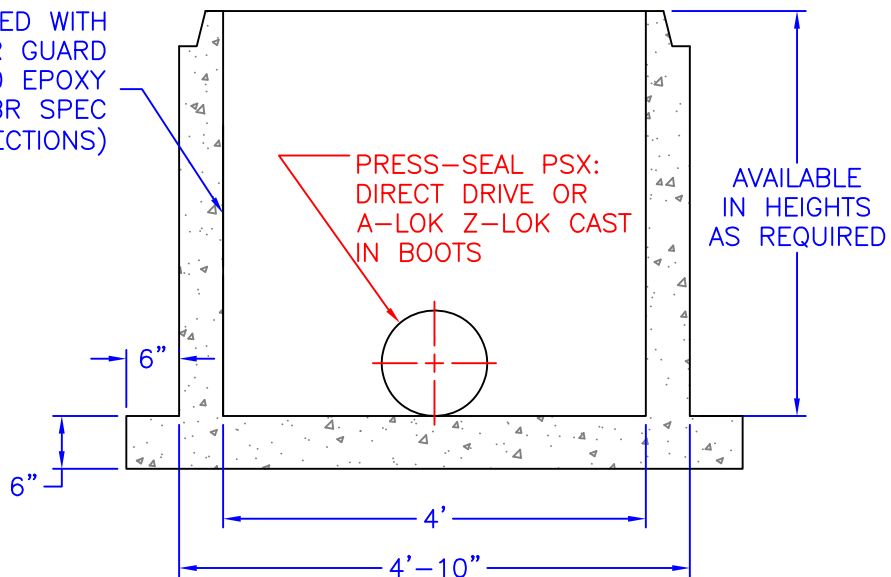

48" EBR STANDARD MANHOLE	SCALE: NTS	12/18/09
--------------------------	------------	----------



28021 Coker-Vail Road
 Phone (225) 567 - 2700
 www.gaineysconcrete.com

Holden, LA
 Fax (225) 567 - 3089