


- NOTES:
1. MANHOLE PRODUCE IN ACCORDANCE WITH ASTM C478
 2. 5,000 PSI MIN. DESIGN STRENGTH AT 28 DAYS
 3. REINFORCED WITH WELDED WIRE MAT AND #4 REBAR AS NEEDED TO MEET REQ. OF ASTM C478
 4. JOINTS TO BE SEALED WITH RAM-NEK FLEXIBLE PLASTIC GASKET (ASTM C990)
 5. TYPE I/II CEMENT SHALL BE USED

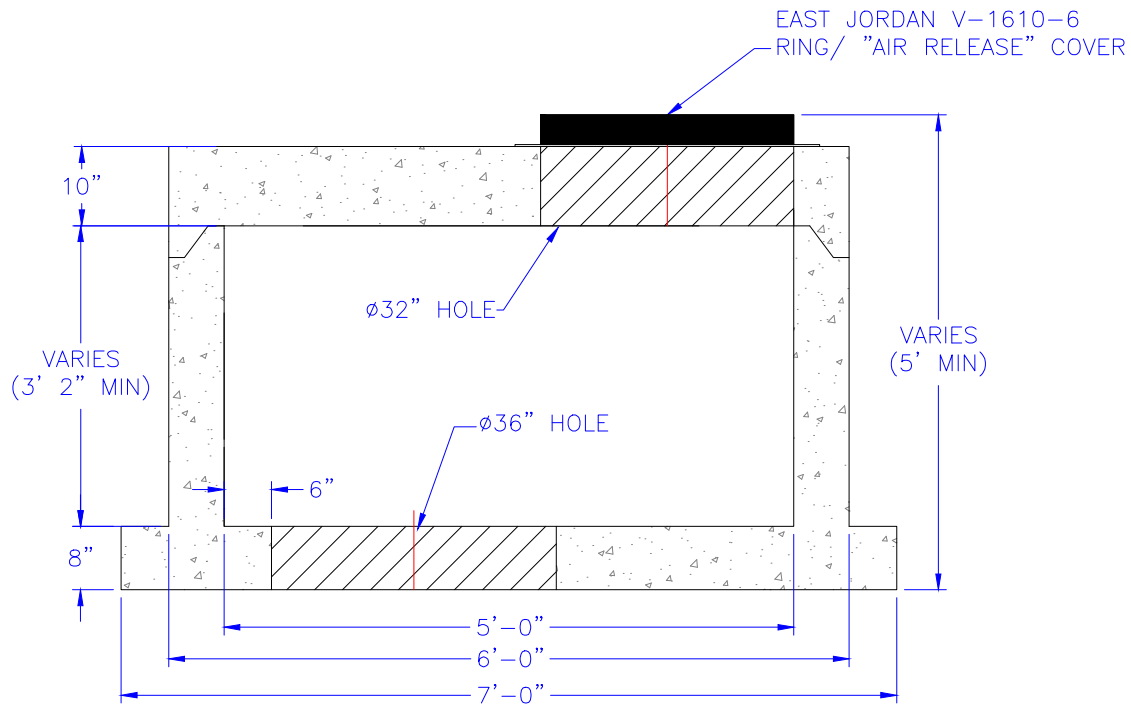

60" AIR RELEASE MANHOLE

EBR STANDARD

1/12/13

gaineys's
CONCRETE PRODUCTS



28021 Coker-Vail Road
Phone (225) 567 - 2700

Holden, LA
Fax (225) 567 - 3089

www.gaineysconcrete.com