


24" CAST IRON RING & COVER

REINFORCED CONCRETE GRADE RING

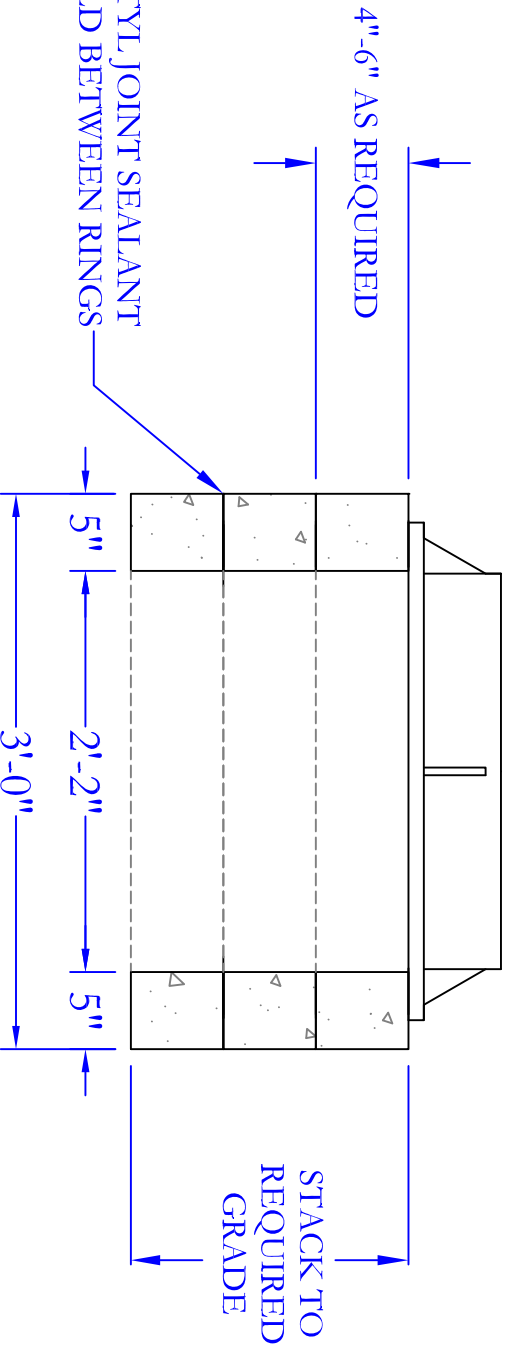

4'-6" AS REQUIRED

RAM-NEK BUTYL JOINT SEALANT APPLIED IN FIELD BETWEEN RINGS

STACK TO REQUIRED GRADE

5" 21'-2" 5" 31'-0"



28021 Coker-Vail Road Holden, LA  
 Phone (225) 567 - 2700 Fax (225) 567 - 3089  
 www.gainey.concrete.com

CONCRETE GRADE RINGS  
 STANDARD DETAIL 9/7/10